


Sentry Batons

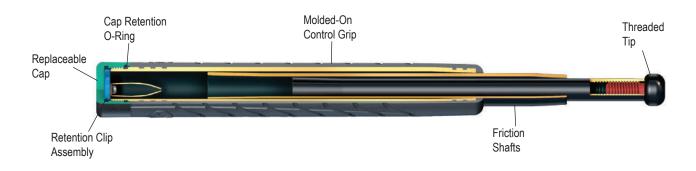

Background

4130 alloy steel tubing

Specifications

Retracted Length		
16	6.2"	15.75 cm
21	7.7"	19.56 cm
26	9.5"	24.13 cm
Expanded Length		
16	15.6"	39.70 cm
21	20.0"	50.80 cm
26	25.6"	65.02 cm
Weight		
16	13.2 ounces	374 grams
21	16.3 ounces	462 grams
26	20.0 ounces	567 grams
Diameter	1"	25.4 mm
Locking System	Friction	

Tubing

4130 40-45 RC

201,000 PSI Tensile

Finish

Black Chrome



Specialty Caps (Breakaway,® Leverage, Logo, Grip) improve the performance of ASP Batons.

Tip

Carbon Steel

Grip

Overmolded Santoprene Strike Force® design

Handle

Zinc undercoat O-ring sealed

Сар

Steel Powder coated

Retention Clip

Spring steel Patented taper design Zinc Dichromate coated Aluminum base



COMPARISON

	Sentry	Friction
Model	S21	F21BF
Steel Alloy	4130	4140
Type of Tubing	DOM	Seamless
Source of Tubing	Japan	Germany
Finish	Black Chrome	Black Chrome
Hardness	RC 40-45	RC 49-57
Tensile Strength	201,000 PSI	238,000 PSI
Grip Material	Santoprene	Kraton
Grip Undercoat	Yellow Zinc Dichromate	Yellow Zinc Did
Сар	Steel	Steel

ichromate

Steel Cap Finish **Powder Coated Powder Coated** Packaging Box Warranty 1 Year

Production Designed in USA by ASP

USA

Assembled Source ASP Taiwan Production Target Market For Security Professionals Clamshell Lifetime Made in USA by ASP

USA ASP USA Production

For Law Enforcement

SideBreak and Federal Scabbards employ the latest polymer technology. SideBreak Scabbards are available in four finishes.





ASP Scabbards rotate to 7 distinct positions.



Phone: 800.264.8273 Address: 8543 Venice Blvd, Los Angeles, CA