


Talon Infinity Batons . . . Simple and Strong

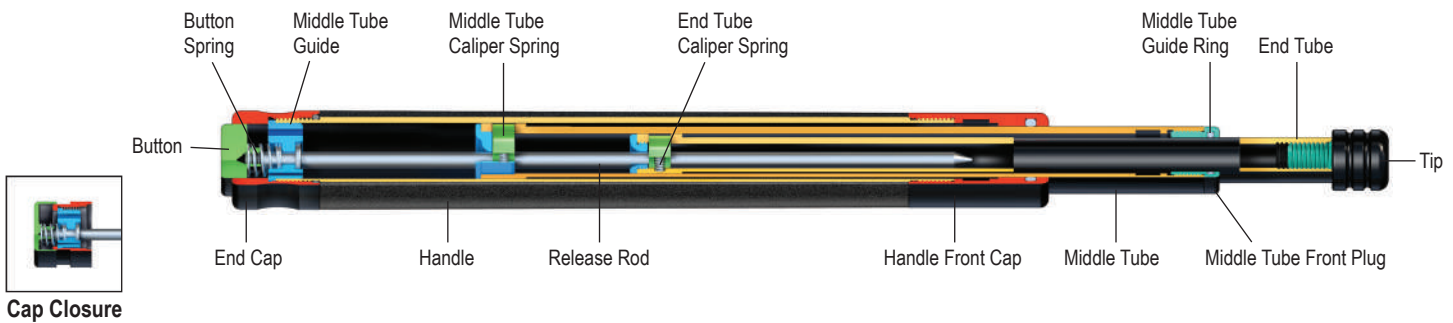

Background

High carbon steel tubing
Precision machined
Heat treated

Specifications

Retracted Length*

40	7.25"	18.4 cm
50	8.57"	21.8 cm
60	9.8"	24.9 cm

*Cap is 0.1" (.25 cm) shorter than Button Release

Expanded Length

40	15.75"	40 cm
50	19.8"	50 cm
60	23.66"	60 cm

Weight (Steel)

40	15.7 ounces	446 g
50	18.5 ounces	526 g
60	21.4 ounces	607 g

Weight (Airweight)

40	9.4 ounces	267 g
50	11.1 ounces	314 g
60	12.7 ounces	359 g

Diameter

1.1" 28 mm

Locking System

Disc Loc

Steel Tubing

4140
49+ RC
150,000 PSI Tensile
120,000 PSI Yield

Aluminum Tubing

7075 T6
87 RB
83,000 PSI Tensile
73,000 PSI Yield

Shafts

Airweight (A)
Black Chrome (B)
Electroless (E)

Locking Bushing

Hardened locking groove
O-ring guide

Locking Lugs

Hardened
Coil spring activated

Tube Stops

Hardened
O-ring dampened
No bounce back

Extended Tip

Two grooves
Continuous tension release
Positive lockup

Grip

Foamed vinyl
Injection molded Vector

Lockup

Discs
Heat treated
Spring activated
Locking groove
Heat treated

Handle

Black Chrome
Protective front collar

Cap Release

Large surface
Easily activated

Button Release

Retention groove
Machined into the cap
Contoured for the little finger

Release

One hand

Scabbards

Envoy
Revolution



ASP Talon Batons are available in a variety of grip textures and shaft finishes.



Retract your Talon® Baton by depressing the release button. It is not necessary to strike the tip of the baton.



Revolution

Scabbards

Envoy and Revolution Scabbards rotate to 7 distinct positions on the duty belt. They will not rotate beyond horizontal or compromise the security of a baton. A retracted Talon Baton may be rapidly presented, yet it is securely retained during dynamic confrontations.



Envoy



Designed for military or special operations, the rotating polymer scabbards will clip onto all modern equipment vests.



securityprousa

Phone: 800.264.8273

Address: 8543 Venice Blvd, Los Angeles, CA