


Talon Infinity Batons . . . Simple and Strong

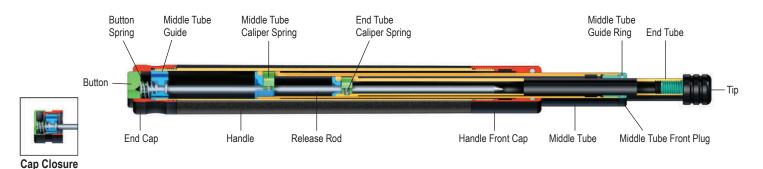

Background High carbon steel tubing Precision machined Heat treated

Specifications

Retracted Length*		
40	7.25"	18.4 cm
50	8.57"	21.8 cm
60	9.8"	24.9 cm
*Cap is 0.1" (.25 cm) shorter than Button Release		
Expanded Length		
40	15.75"	40 cm
50	19.8"	50 cm
60	23.66"	60 cm
Weight (Steel)		
40	15.7 ounces	446 g
50	18.5 ounces	526 g
60	21.4 ounces	607 g
Weight (Airweight)		
40	9.4 ounces	267 g
50	11.1 ounces	314 g
60	12.7 ounces	359 g
Diameter	1.1"	28 mm

Disc Loc

Steel Tubing

4140 49+ RC 150,000 PSI Tensile 120.000 PSI Yield

Locking System

Aluminum Tubing

7075 T6 87 RB 83,000 PSI Tensile 73.000 PSI Yield

Shafts

Airweight (A) Black Chrome (B) Electroless (E)

Locking Bushing

Hardened locking groove O-ring guide

Locking Lugs

Hardened Coil spring activated

Tube Stops

Hardened O-ring dampened No bounce back

Extended Tip

Two grooves Continuous tension release Positive lockup

Grip

Foamed vinyl Injection molded Vector

Lockup

Discs Heat treated Spring activated Locking groove Heat treated

Black Chrome Protective front collar

Cap Release

Large surface Easily activated

Button Release

Retention groove Machined into the cap Contoured for the little finger

Release

One hand

Scabbards

Envoy Revolution



ASP Talon Batons are available in a variety of grip textures and shaft finishes.





Retract your Talon® Baton by depressing the release button. It is not necessary to strike the tip of the baton.

Phone: 800.264.8273



Revolution



Envoy and Revolution Scabbards rotate to 7 distinct positions on the duty belt. They will not rotate beyond horizontal or

compromise the security of a baton. A retracted Talon Baton may be rapidly presented, yet it is securely retained during dynamic confrontations.



Envoy



Designed for military or special operations, the rotating polymer scabbards will clip onto all modern equipment vests.



Address: 8543 Venice Blvd, Los Angeles, CA